


PIPER S

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	7
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	730
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	104
POWER SUPPLY		220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		ON/OFF or PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,72
GROSS WEIGHT	[kg]	0,75
COLOUR (HOUSING)		WHITE ~RAL9003




LIGHT DISTRIBUTION

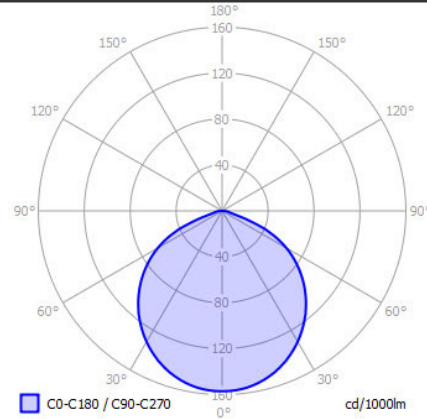

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

Colours



white

MOUNTING DIMENSIONS

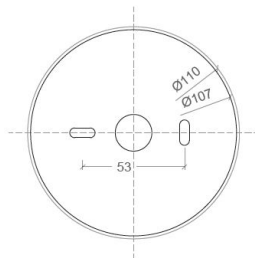

FIXTURE DIMENSIONS

