


RINGO

SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1350
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	96
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP54
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,06
GROSS WEIGHT	[kg]	1,10
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

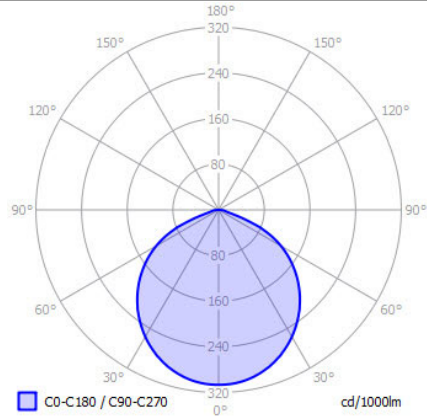

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

MOUNTING DIMENSIONS

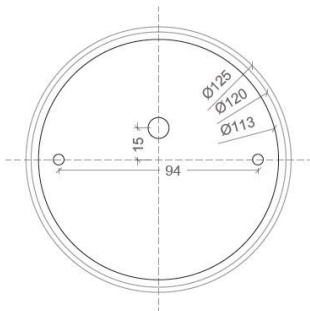

FIXTURE DIMENSIONS



CRI > 90

DIM



IP54

DLS LIGHTING

www.dlslighting.com

***DLS**
LIGHTING